


12-13 Rosemary Court Mulgrave Victoria Australia 3170
 telephone: (03) 8562 0888 facsimile: (03) 8562 0899
 email: sales@fethers.com web: www.fethers.com

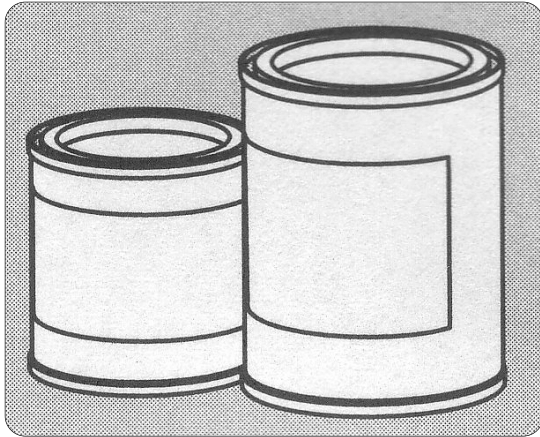

Product Code

FS-Resin

Product Type

Two Part Floor Spring Sealing Compound

Technical Details

- Used to prevent the likelihood of water entering the cement box.
- The two component resin is poured around the body of the closer in the cement box to improve waterproofing.

Product Code

FBC10 GROUT

Product Type

Non Shrink Grout

Typical Details

Compressive Strength	49 MPa @ 1 day 62 MPa @ 7 days 79 MPa @ 28 days
Flexural Strength	2.5 MPa @ 1 day 9.0 MPa @ 7 days 10.0 MPa @ 28 days
Time for expansion	
Start:	5 minutes
Finish:	2 hours
Fresh Wet Density	Approximately 2160 kg/cu.m depending on the consistency used
Young's Modulus	25 GPa
Expansions characteristics	An expansion of up to 1% overcomes shrinkage in plastic material
Setting Times	
Initial:	165 minutes
Final:	270 minutes

IMPORTANT:
 Grout must be mixed strictly in accordance with the manufacturers instructions on the bag. Incorrectly mixed grout can cause excessive corrosion.

